


CONTACT ARRANGEMENT




Pos 1
OFF



Pos 2
EXIT




Pos 3
AUTO



Pos 4
HOLD-OPEN

ARROW INDICATES
CONTACT CLOSURE

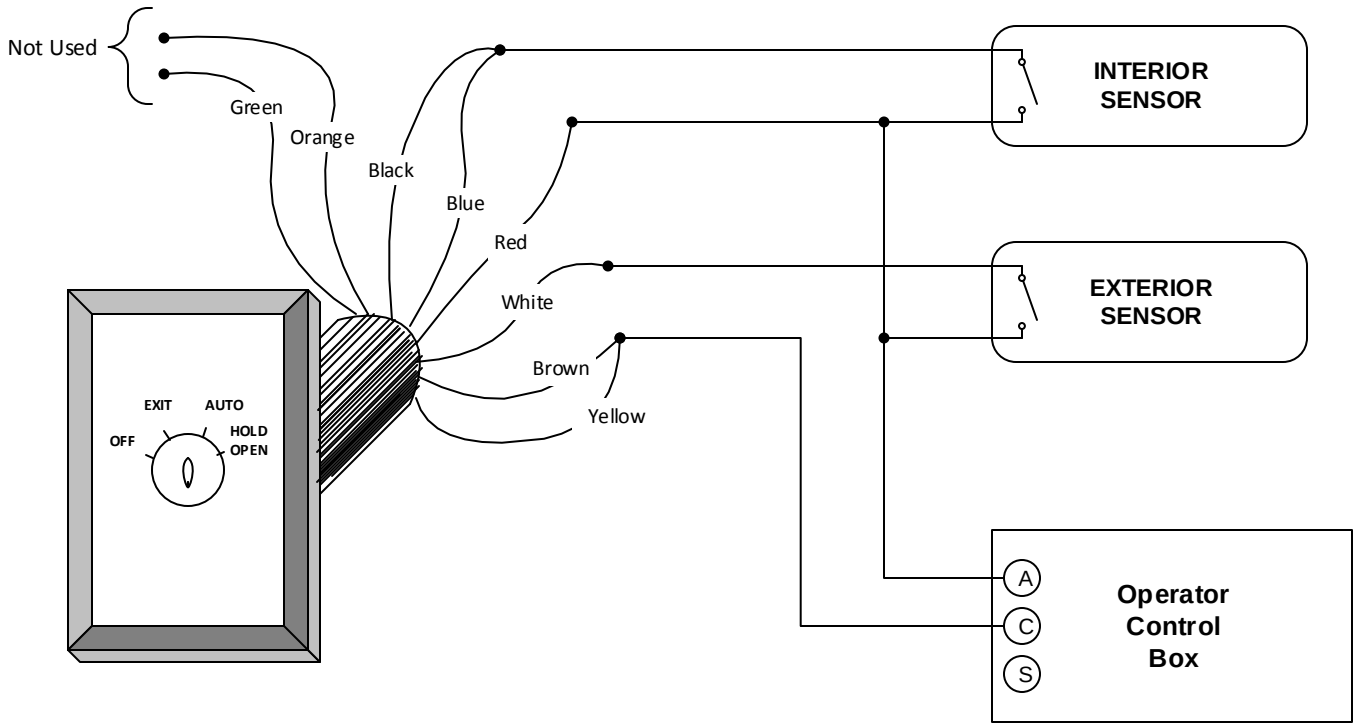

TYPICAL WIRING DIAGRAM

AUTOMATIC SLIDING DOOR
WITH ONE-WAY FEATURE

SPECIFICATIONS

- Contact Rating : 4 amps @ 125VAC
- 4 Tumbler Lock
- All locks keyed alike
- Key removable in all positions
- Switch Depth: 1 1/4"
- Frame hole diameter: 1 1/8" min.

Camden DOOR CONTROLS

Camden Door Controls

5502 Timberlea Blvd.
Mississauga, ON
L4W 2T7

SCALE: NONE	DRAWN BY: DGW	DATE: 05/16/03	REVISED:

Four Position Keyswitch (CM-160/170/180 -24)

DRAWING No: 40-82B020	FILENAME: CM_160_24.vsd