AI Dectection Doorbell
HA-DB-35-MC



NDAA Compliant

AI | 5MP | 3:4 | WDR | CHIME KIT

- Person, loiering & Package Detection
- 2-Way Talk, Event-activated Nightlight
- Full Head to Toe View (3:4) with unique outward leaning design
- 1CH built-in micro SD card slot, up to 512GB
- Support Exiting Mechanic CHIME 16-24V
- Versatile Power Input: Supports AC 16–24V or DC 12–24V for flexible installation.
- Broad Transformer Compatibility: Works with standard 10VA to 40VA AC transformers.

- **Doorbell**


Camera	
Image Sensor	1/2.7" Progressive Scan CMOS
Image Size	1944 × 2592
Electronic Shutter	1/5s ~ 1/100000s
IRIS Type	Fixed IRIS
MIN. Illumination	0 lux (white LED ON)
Lens	2.1mm @F2.0; Vertical FOV:156°, Horizontal FOV: 81°, Diagonal FOV: 192°
Lens Mount	M8
WDR	Yes
BLC	Yes
HLC	Yes
Image	
Video Compression	H.265/H.264/MJPEG
H.264 Compression Standard	Baseline Profile/Main Profile/High Profile
Bit rate Type	VBR/CBR
Bit Rate	256Kbps ~ 6Mbps
Resolution	1944 x 2592, 1800 x 2400, 960 x 1280
Main Stream	50/60Hz: 20fps @ 1944 x 2592,1800 x 2400 (Default),
Sub Stream	50/60Hz: 20fps @ 960 x 1280
Image Setting	Saturation, hue, brightness, contrast, sharpness,3D NR,
Audio Compression	G711A/U
Interface	
Network	100M RJ45
Audio	Built-in MIC×1, built-in speaker×1
Reset Button	Yes
Storage	1CH built-in micro SD card slot, up to 512GB
WiFi	Supports 2.4G/5G WiFi
Doorbell Button	Yes
Indicator	Yes
Function	
Remote Monitoring	Web client/CMS remote control/Moblie App
Online Connection	Supports simultaneous monitoring for up to 5 users Supports multi-stream real time transmission
Network Protocol	UDP, IPv4, DHCP, NTP, RTSP, DDNS, SMTP, UPnP, HTTPS, HTTP
Interface Protocol	ONVIF
Storage	Micro SD card storage
Intelligent Analytics	Humen Detection, Package Detection, Loitering Detection

General Function	video mask, Motion
White Light Distance	1m
IR Light Distance	3m
Ingress Protection	IP65
Others	
Power	AC16-24 V, DC 12-24V
PoE Power Supply	No
Power Consumption	6.6W
Working Environment	-20 °C ~50°C, Humidity: less than 95% (non-condensing)
Dimensions(mm)	146x46x30mm (5.75"x1.81"x1.18")
Weight (net)	115.3g
Installation	Wall mounting (Mounting Bracket. Angled Bracket)
Chime kit	GL-DCK-B

- **Digital Chime**

Model	**HD-DB-3C-- Optional**
General	
Input	AC 100~240 V; 50~60 Hz
Transmission Mode	RF 433 Mhz
Button	Setting up/Selecting ringtones/Adjusting volume
Dimensions	106.5x53.5x38.7mm(4.19"x2.10"x1.52")

- **Dimensions**

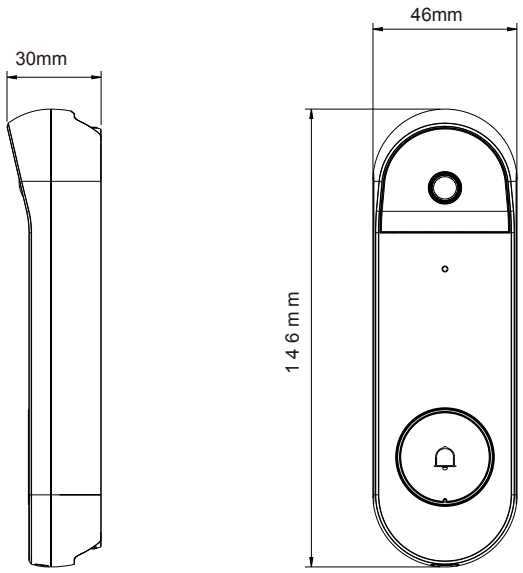

AI Color Pro App